www.becoolfan.com

8025-3 Axial Series

Demensions: 80X80X25 mm

Bearing Type: FDB,Hydraulic,Ball Bearing

Function Type: FG/RD Signal,PWM pulse


Protection: Auto Restart Protection or General Options




SPECIFICATIONS

MODEL NO	VOLTAGE	CURRENT	POWER	SPEED	AIR FLOW		STATIC PRESSURE		NOISE	CURVE
	V	A	W	RPM	CMM	CFM	mmH_2O	INH_2O	(dBA)	
AD8025B/R12L-N(P/M)	12	0.13	1.56	2500	0.919	32.47	3.30	0.130	29.4	L
AD8025B/R12M-N(P/M)	12	0.26	3.12	4000	1.474	52.10	8.11	0.320	40.0	M
AD8025B/R12H-N(P/M)	12	0.51	6.12	5100	1.925	68.03	12.75	0.502	46.6	H
AD8025B/R12U-N(P/M)	12	1.20	14.40	7000	2.620	92.54	21.03	0.827	59.2	U
AD8025B/R24L-N(P/M)	24	0.11	2.64	2500	0.919	32.47	3.30	0.130	29.4	L
AD8025B/R24M-N(P/M)	24	0.22	5.28	4000	1.474	52.10	8.11	0.320	40.0	M
AD8025B/R24H-N(P/M)	24	0.38	9.12	5100	1.925	68.03	12.75	0.502	46.6	H
AD8025B/R24U-N(P/M)	24	0.65	15.60	7000	2.620	92.54	21.03	0.827	59.2	U
AD8025B/R48L-N(P/M)	48	0.08	3.84	2500	0.919	32.47	3.30	0.130	29.4	L
AD8025B/R48M-N(P/M)	48	0.18	8.64	4000	1.474	52.10	8.11	0.320	40.0	M
AD8025B/R48H-N(P/M)	48	0.30	14.40	5100	1.925	68.03	12.75	0.502	46.6	H
AD8025B/R48U-N(P/M)	48	0.45	21.60	7000	2.620	92.54	21.03	0.827	59.2	U

PERFORMANCE CURVES

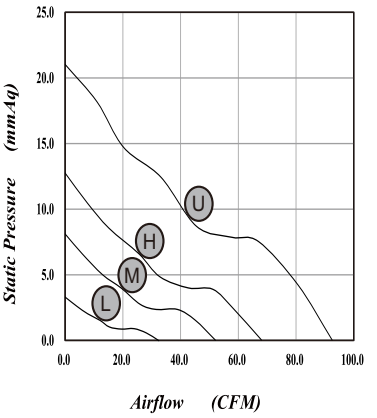

DIMENSIONS DRAWING

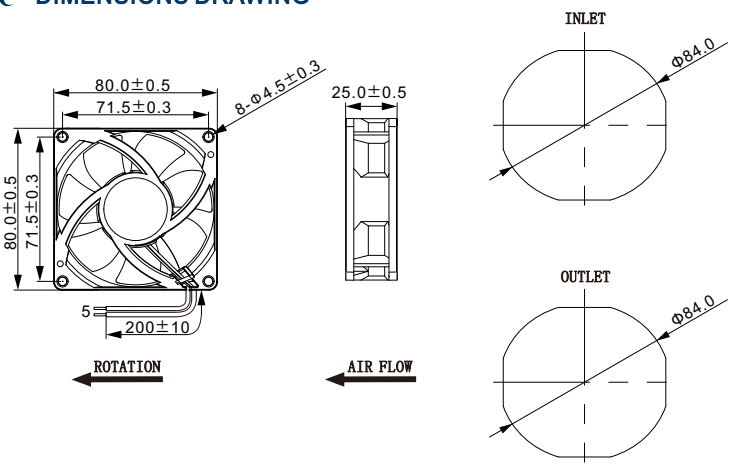

*Specifications are subject to change without notice