

12025-1 Axial Series

Dimensions: 120X120X25 mm

Bearing Type: FDB, Hydraulic, Ball Bearing

Function Type: FG/RD Signal, PWM pulse


Protection: Auto Restart Protection or General Options




SPECIFICATIONS

MODEL NO	VOLTAGE	CURRENT	POWER	SPEED	AIR FLOW		STATIC PRESSURE		NOISE	CURVE
	V	A	W	RPM	CMM	CFM	mmH ₂ O	INHzO	(dBA)	
AD12025B/R05L-N (P/M)	5	0.25	1.25	2000	1.730	61.07	2.44	0.096	37.9	L
AD12025B/R05M-N (P/M)	5	0.35	1.75	2400	2.194	77.46	3.65	0.144	42.6	M
AD12025B/R05H-N (P/M)	5	0.55	2.75	3200	2.837	100.16	5.62	0.221	51.6	H
AD12025B/R12L-N (P/M)	12	0.17	2.04	2000	1.730	61.07	2.44	0.096	37.9	L
AD12025B/R12M-N (P/M)	12	0.28	3.36	2400	2.194	77.46	3.65	0.144	42.6	M
AD12025B/R12H-N (P/M)	12	0.53	6.36	3200	2.837	100.16	5.62	0.221	51.6	H
AD12025B/R24L-N (P/M)	24	0.15	3.60	2000	1.730	61.07	2.44	0.096	37.9	L
AD12025B/R24M-N (P/M)	24	0.25	6.00	2400	2.194	77.46	3.65	0.144	42.6	M
AD12025B/R24H-N (P/M)	24	0.35	8.40	3200	2.837	100.16	5.62	0.221	51.6	H

PERFORMANCE CURVES

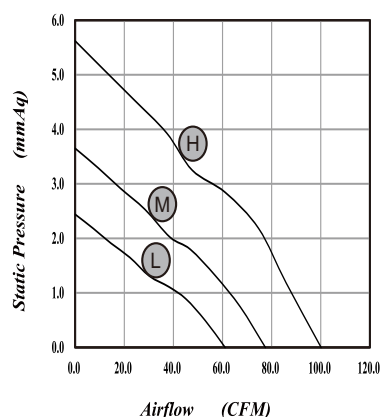

DIMENSIONS DRAWING

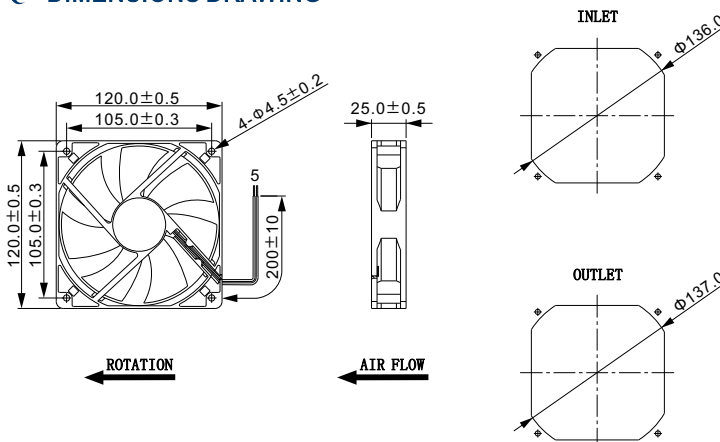

*Specifications are subject to change without notice