

9238-2 Axial Series

Dimensions: 92X92X38 mm

Bearing Type: Ball Bearing

Function Type: FG/RD Signal, PWM pulse


Protection: Auto Restart Protection or General Options





SPECIFICATIONS

MODEL NO	VOLTAGE	CURRENT	POWER	SPEED	AIR FLOW		STATIC PRESSURE		NOISE	CURVE
	V	A	W	RPM	CMM	CFM	mmH ₂ O	INH ₂ O	(dBA)	
9238BVL-N (P/M) 1	12	0.40	4.80	3500	1.902	67.14	8.62	0.339	44.3	L
9238BVM-N (P/M) 1	12	1.00	12.00	5000	2.753	97.18	16.39	0.645	54.2	M
9238BVH-N (P/M) 1	12	2.20	26.40	7000	3.830	135.19	31.01	1.221	61.2	H
9238BVH-N (P/M) 1	12	3.00	36.00	8500	4.741	167.44	44.15	1.738	67.8	U
9238BVL-N (P/M) 2	24	0.55	13.20	3500	1.902	67.14	8.62	0.339	44.3	L
9238BVM-N (P/M) 2	24	1.20	28.80	5000	2.753	97.18	16.39	0.645	54.2	M
9238BVH-N (P/M) 2	24	1.80	43.20	7000	3.830	135.19	31.01	1.221	61.2	H
9238BVH-N (P/M) 2	24	2.00	48.00	8500	4.741	167.44	44.15	1.738	67.8	U
9238BVL-N (P/M) 4	48	0.30	14.40	3500	1.902	67.14	8.62	0.339	44.3	L
9238BVM-N (P/M) 4	48	0.60	28.80	5000	2.753	97.18	16.39	0.645	54.2	M
9238BVH-N (P/M) 4	48	1.00	48.00	7000	3.830	135.19	31.01	1.221	61.2	H
9238BVH-N (P/M) 4	48	1.50	72.00	8500	4.741	167.44	44.15	1.738	67.8	U

PERFORMANCE CURVES

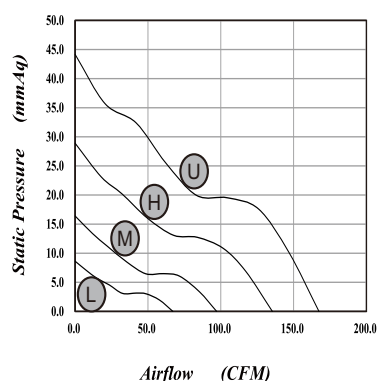

DIMENSIONS DRAWING

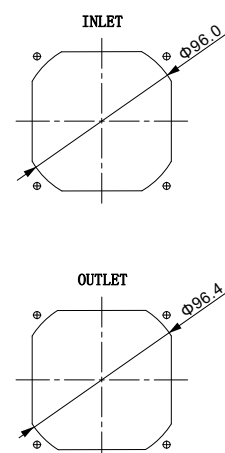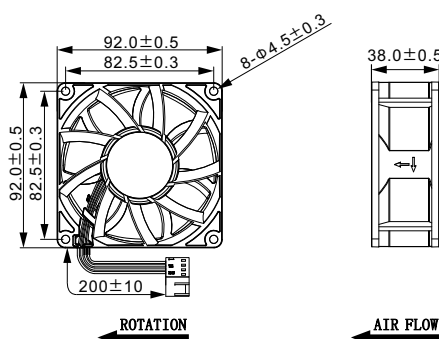

*Specifications are subject to change without notice