

6025-2 Axial Series

Dimensions: 60X60X25 mm

Bearing Type: Ball Bearing

Function Type: FG/RD Signal, PWM pulse


Protection: Auto Restart Protection or General Options




SPECIFICATIONS

MODEL NO	VOLTAGE	CURRENT	POWER	SPEED	AIR FLOW		STATIC PRESSURE		NOISE	CURVE
	V	A	W	RPM	CMM	CFM	mmH ₂ O	INH ₂ O	(dBA)	
6025BVH-N (P/M) 1	12	0.55	6.60	5000	0.673	23.84	8.12	0.320	43.5	H
6025BVU-N (P/M) 1	12	1.30	15.60	8000	1.163	41.09	19.48	0.768	56.6	U
6025BVE-N (P/M) 1	12	2.00	24.00	10500	1.488	52.53	32.85	1.293	63.0	E
6025BVH-N (P/M) 2	24	0.35	8.40	5000	0.673	23.84	8.12	0.320	43.5	H
6025BVU-N (P/M) 2	24	1.00	24.00	8000	1.163	41.09	19.48	0.768	56.6	U
6025BVE-N (P/M) 2	24	1.60	38.40	10500	1.488	52.53	32.85	1.293	63.0	E
6025BVH-N (P/M) 4	48	0.20	9.60	5000	0.673	23.84	8.12	0.320	43.5	H
6025BVU-N (P/M) 4	48	0.80	38.40	8000	1.163	41.09	19.48	0.768	56.6	U
6025BVE-N (P/M) 4	48	1.20	57.60	10500	1.488	52.53	32.85	1.293	63.0	E

PERFORMANCE CURVES

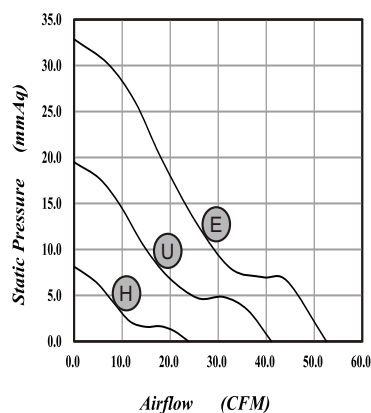

DIMENSIONS DRAWING

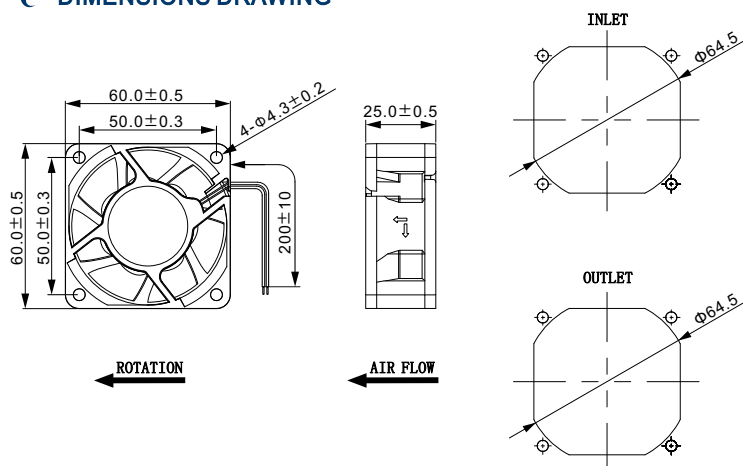

*Specifications are subject to change without notice