

3015 Axial Series

Dimensions: 30X30X15 mm

Bearing Type: FDB, Hydraulic, Ball Bearing

Function Type: FG/RD Signal, PWM pulse


Protection: Auto Restart Protection or General Options




SPECIFICATIONS

MODEL NO	VOLTAGE	CURRENT	POWER	SPEED	AIR FLOW		STATIC PRESSURE		NOISE	CURVE
	V	A	W	RPM	CMM	CFM	mmH ₂ O	INH ₂ O	(dBA)	
3015B/RVL-N (P/M) 5	5	0.18	0.90	8000	0.098	3.47	3.74	0.147	30.4	L
3015B/RVM-N (P/M) 5	5	0.25	1.25	10000	0.125	4.40	5.78	0.227	35.0	M
3015B/RVH-N (P/M) 5	5	0.35	1.72	14000	0.180	6.34	10.51	0.414	40.1	H
3015B/RVL-N (P/M) 1	12	0.08	0.96	8000	0.098	3.47	3.74	0.147	30.4	L
3015B/RVM-N (P/M) 1	12	0.11	1.32	10000	0.125	4.40	5.78	0.227	35.0	M
3015B/RVH-N (P/M) 1	12	0.18	2.16	14000	0.180	6.34	10.51	0.414	40.1	H
3015B/RVL-N (P/M) 2	24	0.08	1.92	8000	0.098	3.47	3.74	0.147	30.4	L
3015B/RVM-N (P/M) 2	24	0.11	2.64	10000	0.125	4.40	5.78	0.227	35.0	M
3015B/RVH-N (P/M) 2	24	0.18	4.32	14000	0.180	6.34	10.51	0.414	40.1	H

PERFORMANCE CURVES

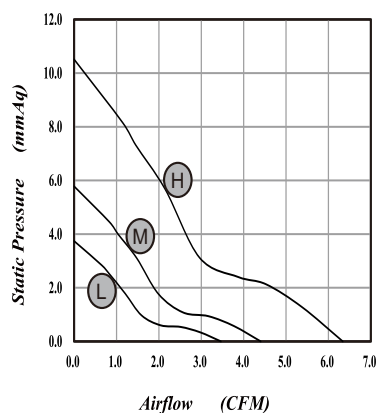

DIMENSIONS DRAWING

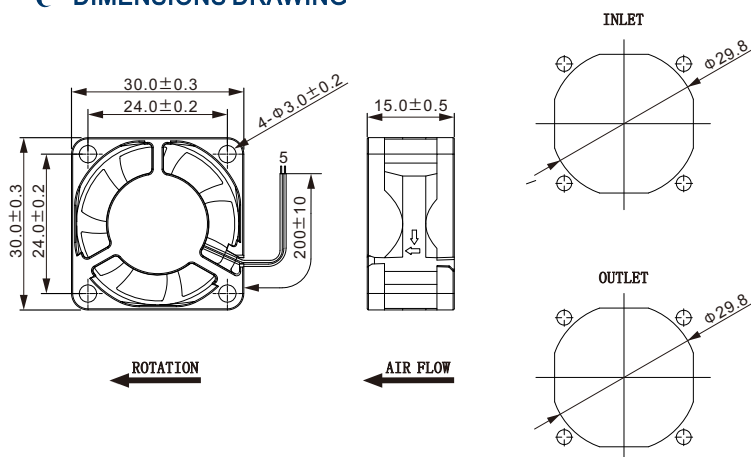

*Specifications are subject to change without notice