

## 6038-1 Axial Series

Dimensions: 60X60X38 mm

Bearing Type: Ball Bearing

Function Type: FG/RD Signal, PWM pulse


Protection: Auto Restart Protection or General Options




## SPECIFICATIONS

MODEL NO	VOLTAGE	CURRENT	POWER	SPEED	AIR FLOW		STATIC PRESSURE		NOISE	CURVE
	V	A	W	RPM	CMM	CFM	mmH <sub>2</sub> O	INH <sub>2</sub> O	(dBA)	
6038BVL-P (M) 1	12	0.60	7.20	6100	0.864	30.52	12.06	0.475	48.9	L
6038BVM-P (M) 1	12	1.20	14.40	8500	1.254	44.27	24.47	0.963	57.7	M
6038BVH-P (M) 1	12	2.50	30.00	12000	1.790	63.24	49.00	1.929	66.8	H
6038BVL-N (P/M) 2	24	0.50	12.00	6100	0.864	30.52	12.06	0.475	48.9	L
6038BVM-N (P/M) 2	24	1.20	28.80	8500	1.254	44.27	24.47	0.963	57.7	M
6038BVH-N (P/M) 2	24	2.25	60.00	12000	1.790	63.24	49.00	1.929	66.8	H
6038BVL-N (P/M) 4	48	0.25	12.00	6100	0.864	30.52	12.06	0.475	48.9	L
6038BVM-N (P/M) 4	48	0.40	19.20	8500	1.254	44.27	24.47	0.963	57.7	M
6038BVH-N (P/M) 4	48	0.80	38.40	12000	1.790	63.24	49.00	1.929	66.8	H

## PERFORMANCE CURVES

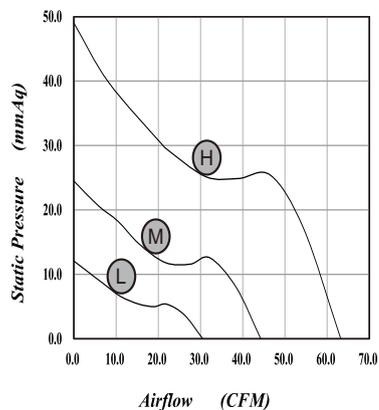

## DIMENSIONS DRAWING

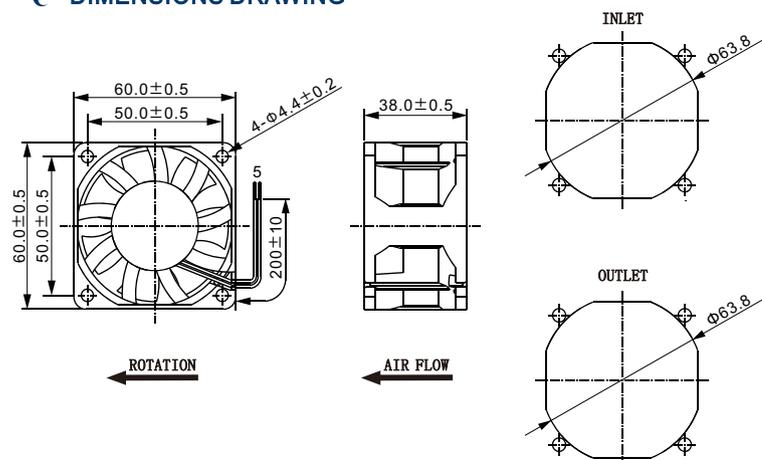

\*Specifications are subject to change without notice