BeCool
www.becoolfan.com

4020 Blower Series




Demensions: 40X40X20 mm
Bearing Type: Hydraulic,Ball Bearing
Function Type: FG/RD Signal,PWM pulse
Protection: Auto Restart Protection or General Options


SPECIFICATIONS

MODEL NO	VOLTAGE	CURRENT	POWER	SPEED	AIR FLOW		STATIC PRESSURE		NOISE	CURVE
	V	A	W	RPM	CMM	CFM	mmH_2O	INH_2O	(dBA)	
402HB/RVL-N(P/M)5	5	0.15	0.75	4000	0.043	1.54	2.25	0.088	23.3	L
402HB/RVM-N(P/M)5	5	0.22	1.10	6000	0.067	2.40	5.89	0.231	34.7	M
402HB/RVH-N(P/M)5	5	0.32	1.60	8000	0.092	3.26	12.30	0.484	44.0	H
402HB/RVL-N(P/M)1	12	0.16	1.92	4000	0.043	1.54	2.25	0.088	23.3	L
402HB/RVM-N(P/M)1	12	0.25	3.00	6000	0.067	2.40	5.89	0.231	34.7	M
402HB/RVH-N(P/M)1	12	0.35	4.20	8000	0.092	3.26	12.30	0.484	44.0	H

PERFORMANCE CURVES

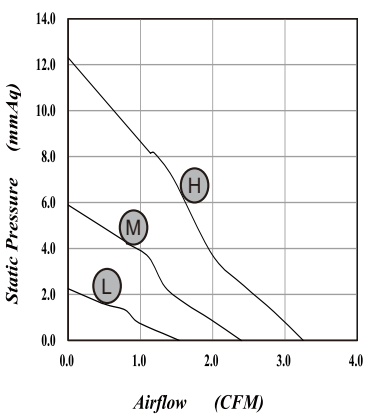

DIMENSIONS DRAWING

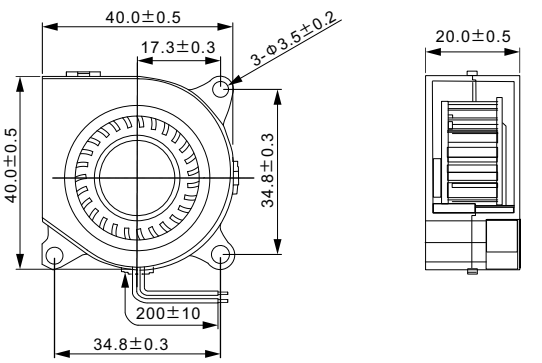

*Specifications are subject to change without notice